

# MAG2P

## Conventional Fire Alarm Panel

**EN54-2/4**

### Description

MAG2P is a conventional fire alarm panel certificated by EN54-2/4, providing 2 fixed zones. Up to 20 (32 SensoMAG Series) fire detectors can be connected to every fire zone. Unlimited number of call points can be connected to every of the fire zones.

MAG2P is situated in a plastic box. The panel is easy for installation and maintenance and provides user-friendly daily operation.

The panel is suitable for residential, small and middle office applications with protected area up to 1000m<sup>2</sup>.


The panel is available in different language versions for the front panel.



### Technical and Environmental Specifications

Main Power Supply . . . . .	~230 ± 10%
Frequency . . . . .	50/ 60Hz
Back-up Power Supply . . . . .	1 battery, 12V/ 7Ah
Power availability . . . . .	0.7A
Main power supply fail consumption. . . . .	50mA
Outputs ( <i>sounder circuits on the control PCB module</i> ) . . . . .	2; 24V/ 0.3A fuse
Output, FAULT Relay . . . . .	1; 3A@120VAC; 3A@60VDC
Output, FIRE Relay . . . . .	1; 3A@120VAC; 3A@60VDC
Auxiliary output . . . . .	24VDC/ 0.3A fuse
Fixed zones . . . . .	2
Detectors per zone / max. number of detectors . . . . .	32/ 64
Multi language front panels. . . . .	YES
Operating temperature . . . . .	0°C to +40°C
Relative humidity resistance . . . . .	(93 ± 3)% @ 40°C
Weight (without battery) . . . . .	~2.1kg
Dimensions of the plastic box . . . . .	340x290x100mm

**CE**  
1293-CPD-0173

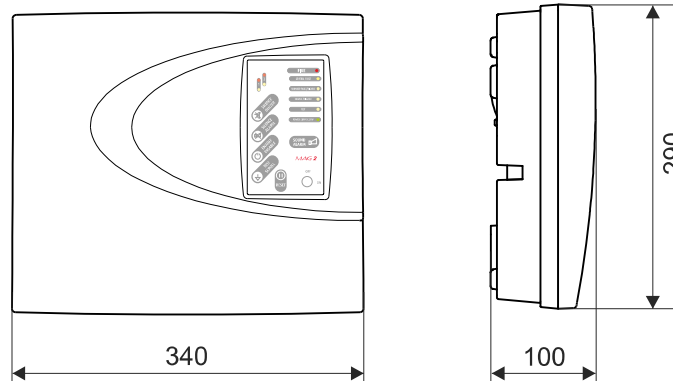

### Contact Information: