



PERFORMANCES	
3 litre model	8A - 89B - 40F
6 litre model	21A - 183B - 75F
9 litre model	27A - 233B - 75F

Innovation

FORMULA

...Fire Protection

FORMULA Fire Extinguishers SA | 73, Kapaneos Str., 10444, Athens
Tel: +30 210 5157400 || Mail: info@formula.com.gr || Web: formula.com.gr

The cartridge-type fire extinguisher range with ecological additive meets all your needs when it comes to the environment and using them in the long-term. Ideal in providing the user with optimal security, the range combines protection of the environment, performance and aesthetics. To be used on class A fires (wood, paper, etc.), class B (petrol, fuel oil, etc.) and class F (cooking oil, etc.). Designed in compliance with regulatory requirements and with an eco-design approach, it responds to the requirements of industrial, service industry, food-processing and domestic activities.

➤ SAFETY :

- Strong injury-proof metal handle,
- Compact design,
- Easily identifiable extinguishing agent,
- Among the top-performing products on the market in its category.

➤ 3-LITRE STORED PRESSURE BIOVERSAL RANGE :

- Manometer for instantly checking that the extinguisher is operational,
- Easy and safe maintenance via a control valve and piston.

➤ 6-9-LITRE CARTRIDGE-TYPE PRESSURE BIOVERSAL® RANGE :

- Cartridge striking immediately visible via indicator and pin that cannot be put back,
- Ergonomic pistol grip handle with 360° action for optimal firefighting capability,
- Recharging and maintenance made easy by a large opening,
- Its aluminium valve is corrosion resistant and it has a long M10 thread.

➤ MAINTENANCE :

- Maintenance made easy as there is no need to denature the additive and discard the mixed water.

➤ ENVIRONMENT :

- A non- corrosive, non-toxic 100% vegetal additive,
- Natural components go beyond the requirements of the REACH regulations,
- Bacteria is not able to develop.

Eurofeu offers a return service for extinguishers that reach their expiration date.

98% OF THE ADDITIVE ELIMINATED AFTER 12 DAYS

ORIGINE FRANCE GARANTIE

BV Cert. 6127186



PROS


- Recognised innovation and exclusivity by its numerous awards and honours,
- Available in 3 to 50 L,
- **BIODEGRADABLE - BIOREMEDIATION AGENT:**
 - Natural regeneration of the contaminated area,
 - Restoration of the ecological balance.

COMPONENTS

- 1 Head assembly without cartridge
 - 2 Cap nut
 - 3 Hose
 - 4 Atomiser
 - 5 40 g CO₂ cartridge
 - 6 Green handle
 - 7 Green safety pin
 - 8 Head gasket (registered design)
 - 9 Striker
 - 10 Plastic discharge seal
 - 11 Dip tube
 - 12 Ejectable cap
 - 13 Wall bracket*
 - 14a Ring
 - 14b Cartridge protection lower part
 - 14c Flat ring
 - 15 Green blower cache
 - 16 Nozzle O-ring
 - 17 Hose O-ring
 - 18 Safety pin
- Options**
- 19 Transport bracket
 - 20 Green base
 - 21 Green hub

6 L	9 L
A018069	A018072
A001683	
A012823	
A018059	
A001349	
A018067	
A021886	
A013623	
A000553	
A001726	
A014079	A014080
A021888	
A001371	
A021788	
A021991	
A021694	
A021866	
A012869	
A012870	
A014054	

A000495	A000506
A021860	A021863
A021875	

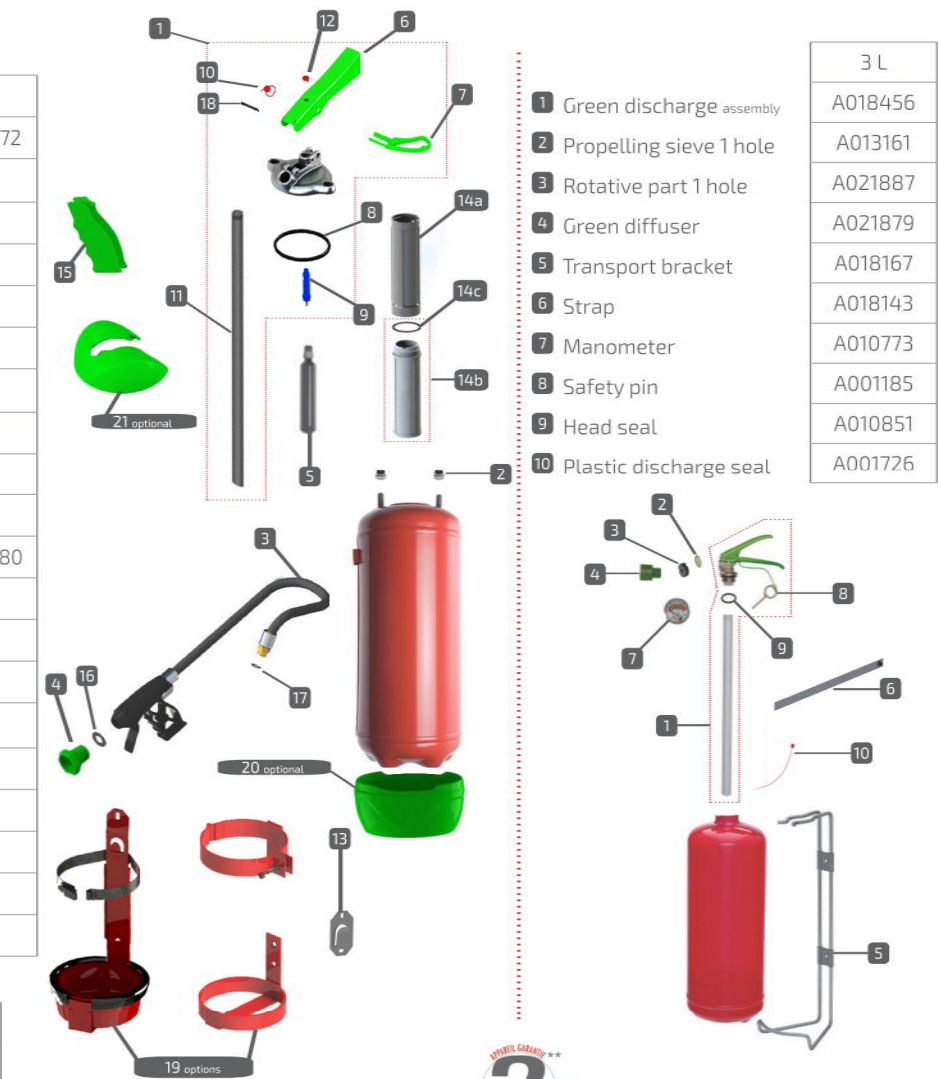

- 1 Green discharge assembly
- 2 Propelling sieve 1 hole
- 3 Rotative part 1 hole
- 4 Green diffuser
- 5 Transport bracket
- 6 Strap
- 7 Manometer
- 8 Safety pin
- 9 Head seal
- 10 Plastic discharge seal

3 L
A018456
A013161
A021887
A021879
A018167
A018143
A010773
A001185
A010851
A001726

*This extinguisher is designed to be hung with the wall bracket. If it is placed on the ground, it must be duly equipped with the appropriate base.
 **Warranty valid providing standard conditions of use and maintenance withheld (refer to the terms and conditions of sale).



Bioversal®
 in association with nature
 Advanced Bio-Technology Applications

TECHNICAL SPECIFICATIONS

	3 L WATER + ECOLOGICAL ADDITIVE	6 L WATER + ECOLOGICAL ADDITIVE	9 L WATER + ECOLOGICAL ADDITIVE
Premixed extinguishing agent	2.817 L water + 0.183 kg BIOVERSAL®	5.63 L water + 0.37 kg BIOVERSAL®	8.35 L water + 0.65 kg BIOVERSAL®
Fire rating	8A-89B-40F	21A-183B-75F	27A-233B-75F
Operating weight	5.325 kg	10.3 kg	14 kg
Height	440 mm	465 mm	560 mm
Overall width	180 mm	220 mm	230 mm
Diameter	130 mm	160 mm	170 mm
Propellant	15 bar (nitrogen + 3% helium)	40 g CO ₂ cartridge	
Operating temperature	0°C to +60°C	0°C to +60°C	
Operating time	23.7 seconds	35.7 seconds	57.3 seconds
Packaging L x W x H	460 x 170 x 150	600 x 200 x 175	660 x 220 x 185
Palletisation L x W x H (quantity per pallet)	800 x 1200 x 1530 (105 units)	800 x 1200 x 1575 (64 units)	800 x 1200 x 1625 (40 units)
Pallet weight	570 kg	700 ± 5 kg	584 ± 5 kg

FORMULA
 ΠΥΡΟΣΒΕΣΤΗΡΕΣ

FORMULA Πυροσβεστήρες ΑΕ

Καπανεώς 73, Αθήνα - Τηλ. 210 5157400
 formula.com.gr / info@formula.com.gr

YOUR CONTACT

FORMULA
 ...Fire Protection

FORMULA Fire Extinguishers SA | 73, Kapaneos Str., 10444, Athens
 Tel: +30 210 5157400 | Mail: info@formula.com.gr | Web: formula.com.gr